

MDR-V7

SERVICE MANUAL

US Model
AEP Model
E Model




SPECIFICATIONS

Type	Circum-aural, closed
Driver units	40 mm, dynamic type, 63 ohms
Sensitivity	106 dB/mW
Power handling capacity	1 W
Frequency response	5 — 30,000 Hz
Cord	3 m long oxygen-free copper Litz wire with a gold-plated stereo unimatch plug
Weight	Approx. 230 g (without cord)


1. DISASSEMBLY

Note: Follow the disassembly procedure in the numerical order given.

- Remove 4 pawls as illustrated below.

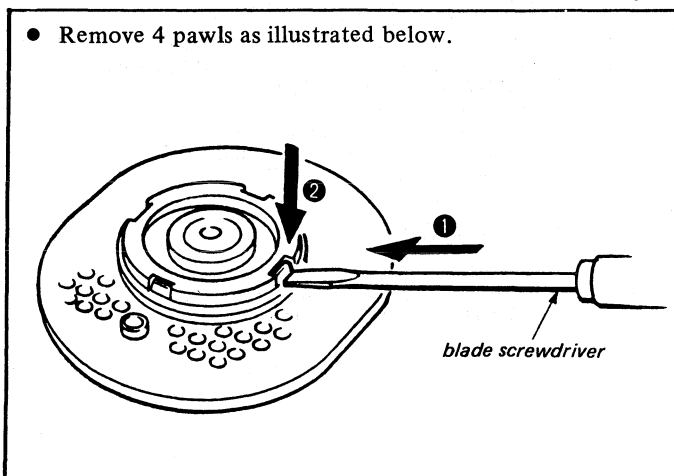


2. WIRING DIAGRAM

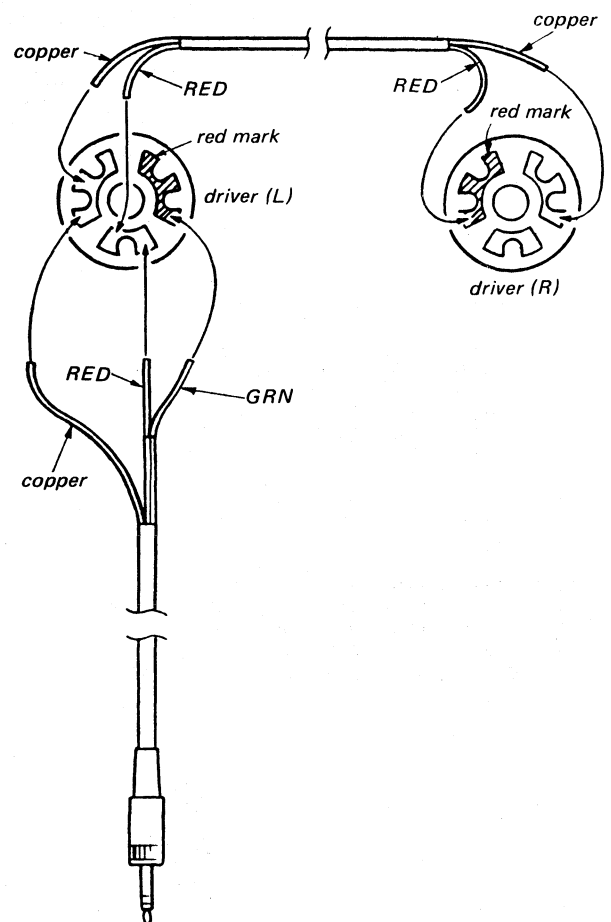

STEREO HEADPHONES
SONY®

3. EXPLODED VIEW AND PARTS LIST

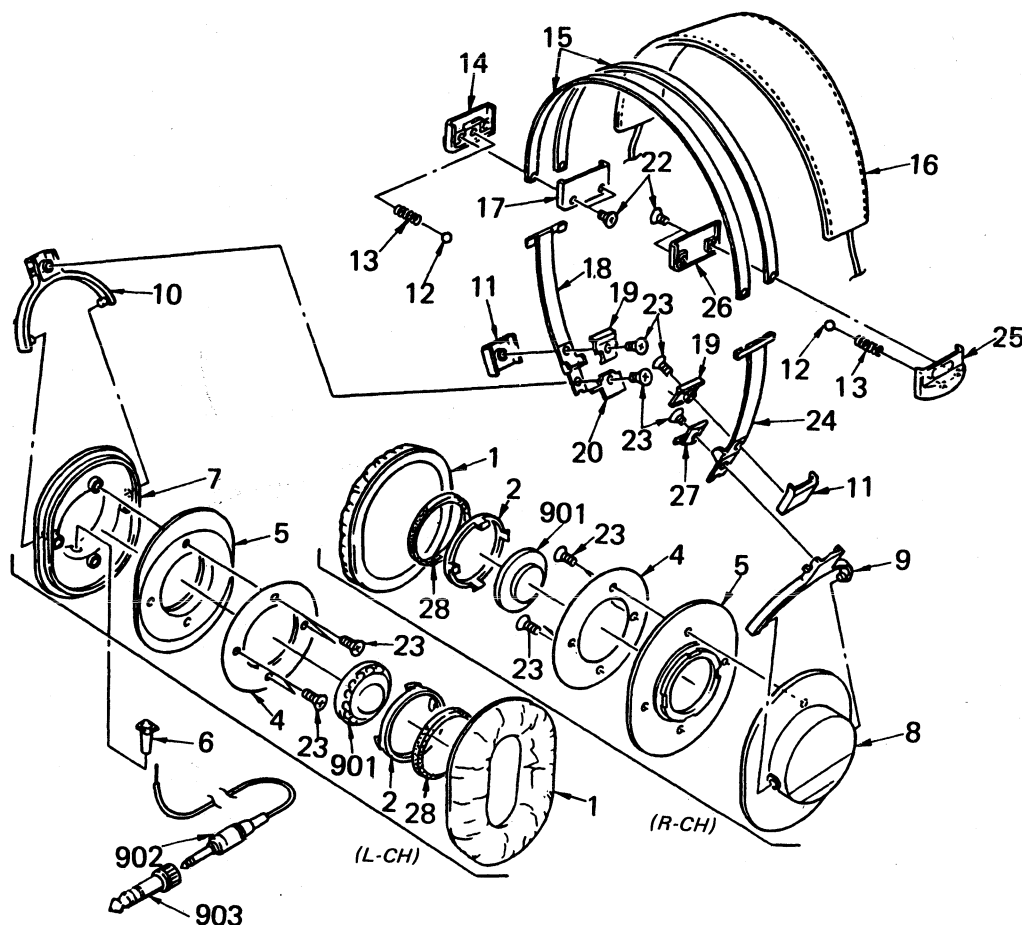

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
1	X-2113-124-1	PAD ASSY, EAR		19	2-113-123-11	LID, HINGE CASE	
2	2-113-129-01	STOPPER, DRIVER		20	2-115-669-01	LID (LEFT), HANGER	
4	*2-113-152-02	REGISTER, FRONT		22	7-685-235-19	SCREW +KTP 2.6X10 TYPE2 SLIT	
5	*2-113-140-01	PLATE, FRONT		23	7-685-232-19	SCREW +KTP 2.6X5 TYPE2NON-SLIT	
6	2-113-137-01	BUSHING		24	2-120-927-01	SLIDER 'RIGHT'	
7	X-2113-127-1	HOUSING (LEFT) ASSY		25	X-2113-128-1	CASE (RIGHT) ASSY, CLICK	
8	X-2113-126-1	HOUSING (RIGHT) ASSY		26	*2-113-125-11	LID (RIGHT), CLICK CASE	
9	2-115-672-01	HANGER (RIGHT)		27	2-115-670-01	LID (RIGHT), HANGER	
10	2-115-671-01	HANGER (LEFT)		28	2-113-149-01	RING, URETHANE	
11	2-113-134-11	CASE, HINGE		ELECTRICAL PARTS			
12	7-671-113-02	STEAL, BALL 3		901	1-505-076-01	DRIVER	
13	2-113-146-01	SPRING, COMPRESSION		902	1-559-718-11	CORD (WITH PLUG)	
14	X-2113-129-1	CASE (LEFT) ASSY, CLICK		903	1-506-589-11	ADAPTOR, PLUG	
15	2-120-926-01	BAND, HEAD					
16	X-2113-130-1	CUSHION ASSY, HEAD					
17	*2-113-124-11	LID (LEFT), CLICK CASE					
18	2-120-928-01	SLIDER (LEFT)					

- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.